

## Silicone-Rubber-Laminate Tank Heaters

**Fast, Efficient Heat for Small Tanks and Vessels**



- Flexible to conform to the surface of the tank or vessel
- Strong, durable construction
- Moisture and chemical resistant
- Requires less power than other methods
- 120 to 480 V
- Maximum 15 A
- Silicone rubber material temperature range: -70° to 392°F (-56° to 200°C)
- Widths: Up to 24 in. (610 mm)
- Lengths: Up to 96 in. (2.4 m)
- Watt densities:
  - ✓ 2.0 W/in.<sup>2</sup> (0.3 W/cm<sup>2</sup>) for metal tanks
  - ✓ 0.7 W/in.<sup>2</sup> (0.1 W/cm<sup>2</sup>) for plastic tanks
- Power rating: 200 W to 1.3 kW
- UL listed and CSA certified

**The Chromalox<sup>®</sup> SLTH silicone-rubber-laminate tank heater provides reliable, efficient heat to metal and plastic tanks and vessels for freeze protection or process temperature control. The thin, flexible profile of the SLTH heater makes it easy to conform to the tank or vessel surface for fast, efficient heat transfer. Its rugged construction ensures dependable service.**



## Fast, Efficient Heat Transfer

The SLTH heater heats the contents of the tank or vessel by convection. Its thin profile together with direct application of the SLTH heater to a surface provides fast, efficient heat transfer. Less power is required to heat the contents compared to other methods.

## Rugged Construction for Dependable Service

The construction of the SLTH heater combines flexibility and durability for harsh working environments. High-temperature resistance wire is laminated between two layers of moisture- and chemical-resistant silicone rubber/fiberglass fabric for durability and strength. Then it is calendared for a thin, flexible profile. A flexible stainless steel shroud provides additional protection.

## Low-Watt-Density Heat for Metal and Plastic Tanks

Two watt densities are available. For metal tanks, SLTH heaters are designed to deliver 2.0 W/in.<sup>2</sup> (0.1 W/cm<sup>2</sup>). For plastic tanks (polypropylene, polyethylene, and other heat-sensitive vessels), SLTH heater watt density is 0.7 W/in.<sup>2</sup> (0.1 W/cm<sup>2</sup>).

## Standard and Custom Sizes

A number of standard sizes are available. See the standard specification and ordering information table, selecting model number and PCN.


Custom sizes are also available and can be ordered using the custom ordering information.

An optional mounting kit is available for installation.

For assistance, consult your Chromalox representative.



## Dimensional Specifications

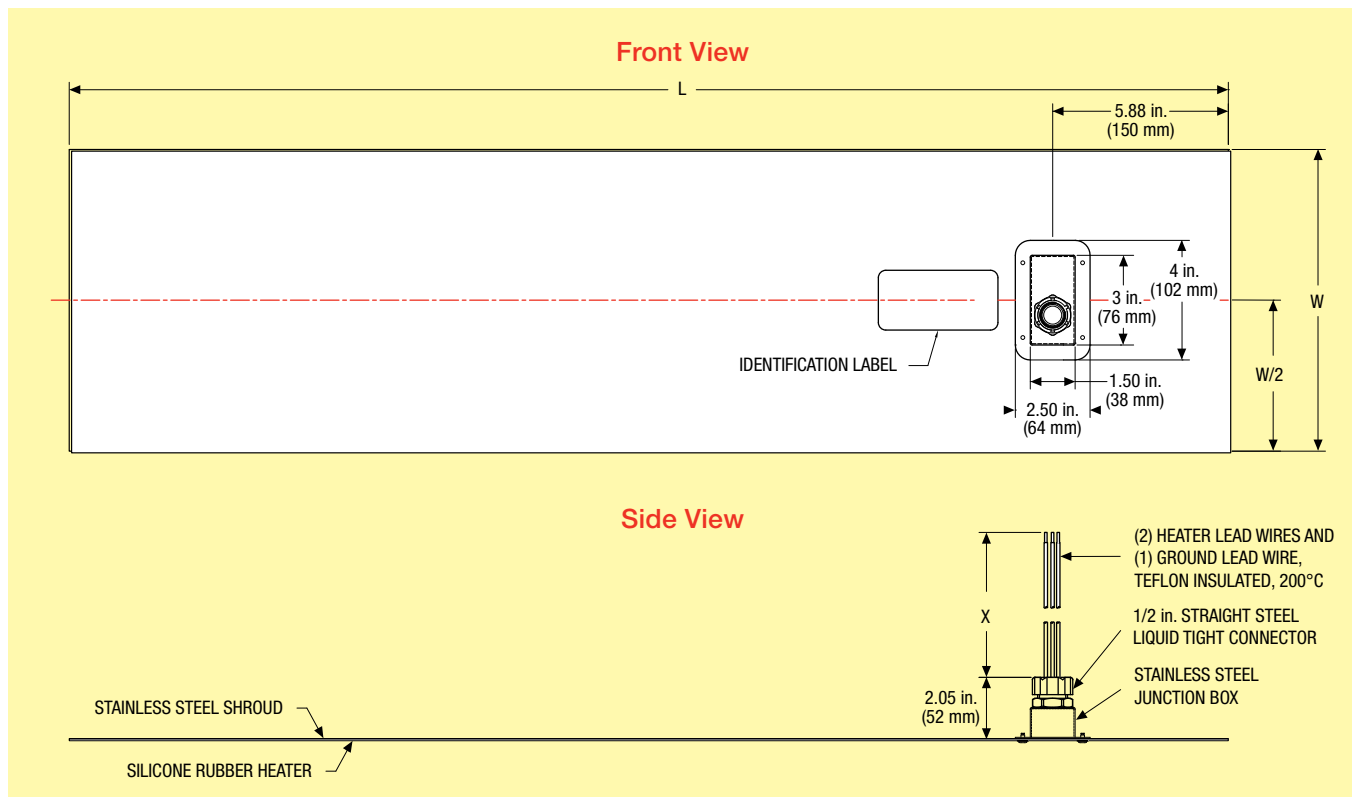

## Standard SLTH Specification and Ordering Information

Watts	Volts	Dimensions		Model No.	Stock	PCN	Weight lb (kg)
		Width in. (mm)	Length in. (mm)				
<b>Metal Tanks or Vessels</b>							
575	120	12 (305)	24 (610)	SLTHM11224072	NS	123318	2 (0.9)
575	240	12 (305)	24 (610)	SLTHM21224072	NS	123326	2 (0.9)
850	120	12 (305)	36 (915)	SLTHM11236072	NS	123334	3 (1.4)
850	240	12 (305)	36 (915)	SLTHM21236072	NS	123342	3 (1.4)
1,725	240	24 (610)	36 (915)	SLTHM22436072	NS	123350	4 (1.8)
<b>Plastic Tanks or Vessels</b>							
200	120	12 (305)	24 (610)	SLTHP11224072	NS	123369	2 (0.9)
200	240	12 (305)	24 (610)	SLTHP21224072	NS	123377	2 (0.9)
300	120	12 (305)	36 (915)	SLTHP11236072	NS	123385	3 (1.4)
300	240	12 (305)	36 (915)	SLTHP21236072	NS	123393	3 (1.4)
600	240	24 (610)	36 (915)	SLTHP22436072	NS	123406	4 (1.8)
Mounting Kit					S	123414	2 (0.9)

## SLTH Tank Heaters Custom Ordering Information

**SLTH** Silicone-Rubber-Laminate Tank Heater

Code	W/in. <sup>2</sup>
M	2.0
P	0.7
Code	Length (in.)
xx.xx	
Code	Width (in.)
xx.xx	
Code	Voltage
1	120 V
2	240 V
4	480 V
Code	Lead Length (in.)
xx.xx	
TH-	M
12	24
2	72
Typical Model Number	



**103 Gamma Drive**  
Pittsburgh, PA 15238  
USA

**Phone: (412) 967-3800**  
**Fax: (412) 967-5148**  
**Toll-Free: 1-800-443-2640**

**email: [sales@chromalox.com](mailto:sales@chromalox.com)**  
**[www.chromalox.com](http://www.chromalox.com)**

**Chromalox-UK**  
Unit 122, Lombard House  
2 Purley Way  
Croydon, Surrey, CR0 3JP  
UK

Tel: +44 (0)20 8665 8900  
Fax: +44 (0)20 8689 0571

email: [uksales@chromalox.com](mailto:uksales@chromalox.com)  
[www.chromalox.co.uk](http://www.chromalox.co.uk)

**Chromalox-France**  
Route de Château-Thierry  
Noyant et Aconin  
F-02203 SOISSONS Cedex  
France

Tel: +33 (0)3 23 74 39 39  
Fax: +33 (0)3 23 74 39 00

email: [francesales@chromalox.fr](mailto:francesales@chromalox.fr)  
[www.chromalox.fr](http://www.chromalox.fr)

**Chromalox-Germany GmbH**  
Im Defdahl 10 B  
44141 Dortmund  
HRB 24583 AG Dortmund  
Germany

Tel: +49 (0) 231-58 44 990-0  
Fax: +49 (0) 231-58 44 990-9

email: [Kontakt@chromalox.com](mailto:Kontakt@chromalox.com)  
[www.chromalox.de](http://www.chromalox.de)

**Chromalox-China**  
Chromalox (Shanghai) Precision Heat  
and Control Co., Ltd.  
Suite A2, 4th Floor, Fenggu Building  
88 Taigu Road  
Waigaoqiao Free Trade Zone  
Shanghai 200131  
People's Republic of China

Tel: +86 (0)21-5866-8802  
Fax: +86 (0)21-5866-8803

email: [shanghai.office@chromalox.com](mailto:shanghai.office@chromalox.com)  
[www.chromalox.cn](http://www.chromalox.cn)

**Chromalox-India**  
1st Floor, 6 UNICOM House  
A-3 Commercial Complex  
Janakpuri  
New Delhi-10058  
India

Tel: +91-11-25623134  
Fax: +91-11-25623480

email: [indiasales@chromalox.com](mailto:indiasales@chromalox.com)  
[www.chromalox.in](http://www.chromalox.in)

**Chromalox-Thailand**  
75/57, 75/237-240, Moo 10  
Sukhumvit Road  
Thung Sukala  
Sriracha  
Chon Buri, 20230  
Thailand

Tel: +66 (0)38 492944/5  
Fax: +66 (0)38 492946

email: [asiasales@chromalox.com](mailto:asiasales@chromalox.com)  
[www.chromalox.com](http://www.chromalox.com)